

### STVS MODULAR - BOLLARD

#### **KEY FEATURE:**

- · High quality welding by robot
- · Can be fill the concrete at site
- · Architecture grade polyester powder coating finishing
- Variety finishing option for types of environment

#### STVS MODULAR - STEEL BOLLARD SPECIFICATION:

#### Finishing:

- o Option 1: (G1) Powder coating on mild steel (RAL 1033) Recommend for indoor application
- o Option 2: (G2) Hot dip galvanized
- o Option 3: (G3) Powder coating on hot dip galvanized
- NOTE: The cap always finish by Epoxy primer + Top coat Polyester powder coating mat black

#### **Dimension**:

- Option 1: D114.3 x 3.0mm
- o Option 2: D141.3 x 4.0mm
- o Option 3: D168.3 x 4.0 mm

#### **Product length:**

- 1000 mm: (T1) Connect to mount by flange Wedge bolt M16-150 with black plastic cap
- ∘ 1200 mm: (T2) Buried 200mm into the concrete floor
- $\circ\,$  1500 mm : (T3) Buried 500mm into the ground floor








## STVS MODULAR T1 - ON FLANGE

#### **KEY FEATURE:**

- · Elegant design
- · High quality welding by robot
- · Can be fill the concrete at site
- Architecture grade polyester powder coating finishing in safety yellow color RAL 1033
- Variety finishing option for types of environment
- Wedge bolt M16-150 with plastic cap cover the bolts
- Finishing option:
  - Option 1: (G1) Powder coating on mild steel (RAL 1033) - Recommend for indoor application
  - o Option 2: (G2) Hot dip galvanized
  - Option 3: (G3) Powder coating on hot dip galvanized

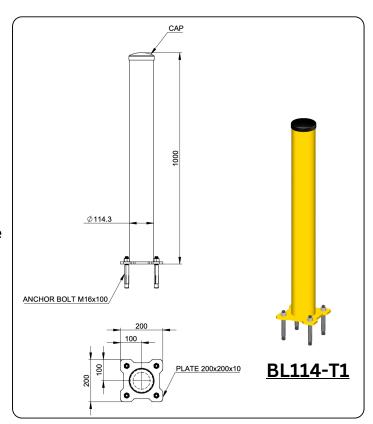

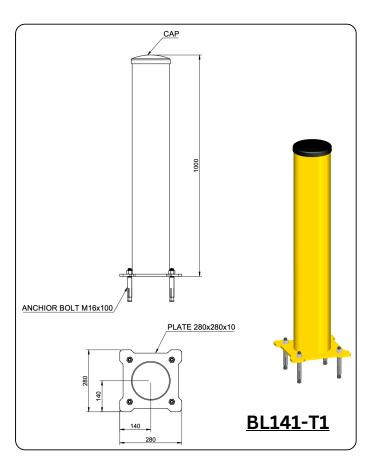

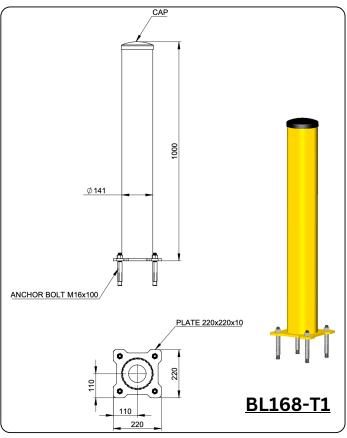






# STVS MODULAR - T2 - BURIED 200MM INTO CONCRETE

#### **KEY FEATURE:**

- · Elegant design
- STRONG and can be fill the concrete at site
- Architecture grade polyester powder coating finishing in safety yellow color RAL 1033
- Variety finishing option for types of environment
- · Finishing option:
  - Option 1: (G1) Powder coating on mild steel (RAL 1033) - Recommend for indoor application
  - o Option 2: (G2) Hot dip galvanized
  - Option 3: (G3) Powder coating on hot dip galvanized

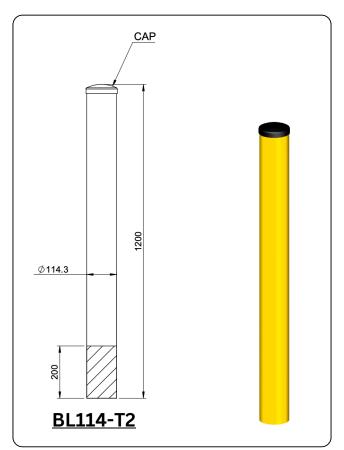

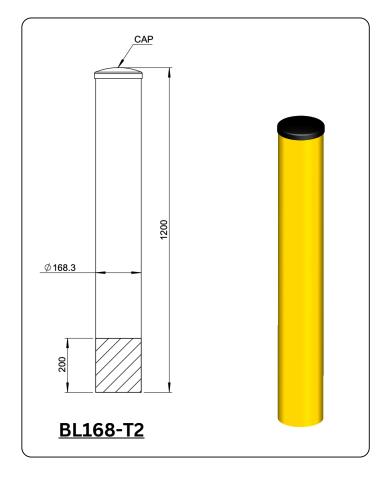

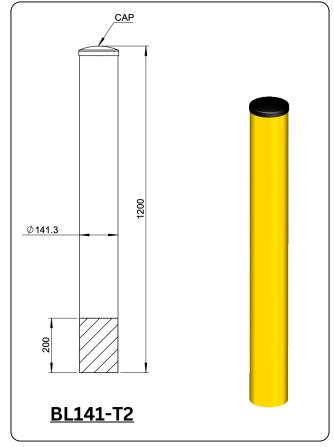





## STVS MODULAR - T3 - BURIED 500MM INTO


## **THE GROUND**

#### **KEY FEATURE:**

- Suitable for ground area without concrete floor
- · Can be fill the concrete at site
- Architecture grade polyester powder coating finishing in safety yellow color RAL 1033
- Variety finishing option for types of environment
- Finishing option:
  - Option 2: (G2) Hot dip galvanized
  - Option 3: (G3) Powder coating on hot dip galvanized

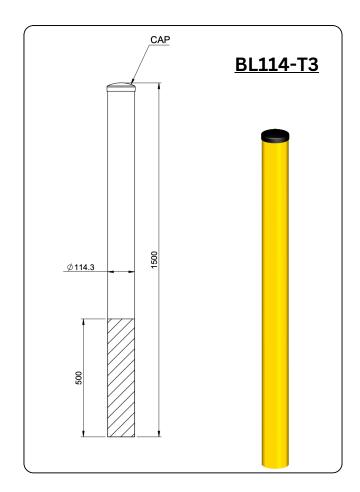

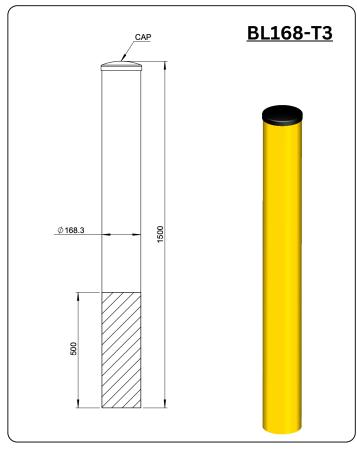

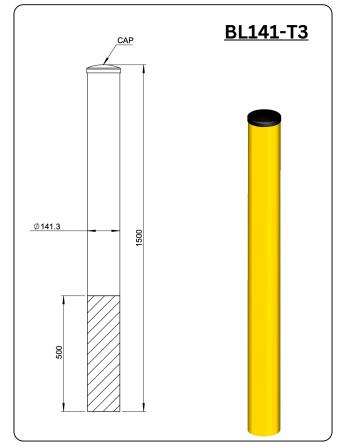



## **PRODUCT LIST**

No	Product code	Dimension (mm)	Length (mm)	Connection to mount	Finishing
1	BL114-T1-G1	D114.3 x 3.0	1000	On flange	Powder coating on mild steel
2	BL114-T1-G2	D114.3 x 3.0	1000	On flange	Hot dip galvanized
3	BL114-T1-G3	D114.3 x 3.0	1000	On flange	Powder coating on hot dip galvanized
4	BL114-T2-G1	D114.3 x 3.0	1200	Burried 200 mm into the concrete floor	Powder coating on mild steel
5	BL114-T2-G2	D114.3 x 3.0	1200	Burried 200 mm into the concrete floor	Hot dip galvanized
6	BL114-T2-G3	D114.3 x 3.0	1200	Burried 200 mm into the concrete floor	Powder coating on hot dip galvanized
7	BL114-T3-G1	D114.3 x 3.0	1500	Burried 500mm into the ground floor	Powder coating on mild steel
8	BL114-T3-G2	D114.3 x 3.0	1500	Burried 500mm into the ground floor	Hot dip galvanized
9	BL114-T3-G3	D114.3 x 3.0	1500	Burried 500mm into the ground floor	Powder coating on hot dip galvanized
10	BL141-T1-G1	D141.3 x 4.0	1000	On flange	Powder coating on mild steel
11	BL141-T1-G2	D141.3 x 4.0	1000	On flange	Hot dip galvanized
12	BL141-T1-G3	D141.3 x 4.0	1000	On flange	Powder coating on hot dip galvanized
13	BL141-T2-G1	D141.3 x 4.0	1200	Burried 200 mm into the concrete floor	Powder coating on mild steel
14	BL141-T2-G2	D141.3 x 4.0	1200	Burried 200 mm into the concrete floor	Hot dip galvanized
15	BL141-T2-G3	D141.3 x 4.0	1200	Burried 200 mm into the concrete floor	Powder coating on hot dip galvanized
16	BL141-T3-G1	D141.3 x 4.0	1500	Burried 500mm into the ground floor	Powder coating on mild steel
17	BL141-T3-G2	D141.3 x 4.0	1500	Burried 500mm into the ground floor	Hot dip galvanized
18	BL141-T3-G3	D141.3 x 4.0	1500	Burried 500mm into the ground floor	Powder coating on hot dip galvanized
19	BL168-T1-G1	D168.3 x 4.0	1000	On flange	Powder coating on mild steel
20	BL168-T1-G2	D168.3 x 4.0	1000	On flange	Hot dip galvanized
21	BL168-T1-G3	D168.3 x 4.0	1000	On flange	Powder coating on hot dip galvanized
22	BL168-T2-G1	D168.3 x 4.0	1200	Burried 200 mm into the concrete floor	Powder coating on mild steel
23	BL168-T2-G2	D168.3 x 4.0	1200	Burried 200 mm into the concrete floor	Hot dip galvanized
24	BL168-T2-G3	D168.3 x 4.0	1200	Burried 200 mm into the concrete floor	Powder coating on hot dip galvanized
25	BL168-T3-G2	D168.3 x 4.0	1500	Burried 500mm into the ground floor	Hot dip galvanized
26	BL168-T3-G3	D168.3 x 4.0	1500	Burried 500mm into the ground floor	Powder coating on hot dip galvanized

Website: https://stvs.co/